

# Professional Grade Carton Sealing Solutions

The Applicable Tape Width Is  
30-100Mm



# Industrial High-Grade Pcb Upgrade


Ordinary Button Paper Discharge




Sensor Function Tape Discharge



Water Temperature Is Not Affected By The Environment, 0°-80° Adjustable

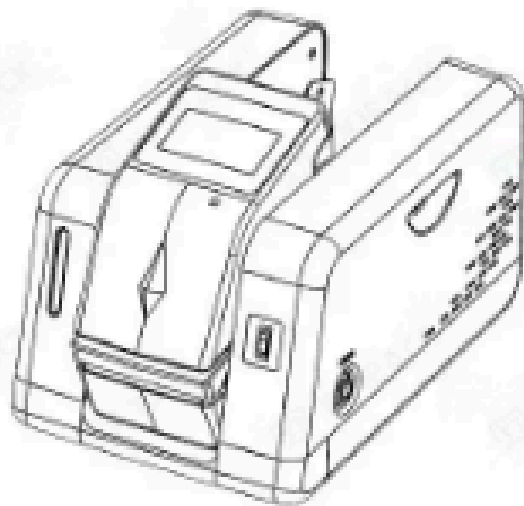

Certificates:	CE ,PSE
Body material:	anti-static ABS
Operation mode:	Physical keys
Modes:	Auto Mode Write Mode Manual Mode
External hardware:	UM-Cj0l detector,footswitch,USB 2.0 cable (for connection to PC)
Tape specifications:	4~80mm*260mm(width and diameter)
Feeding speed:	60metres/minute
Voltage requirement:	100-240VAC50/60HZ
Rated current:	3A
Power:	110W
Product Size:	468*297*310
Packaging Size:	600*400*370
Weight:	12.3 kg (estimated)



New Upgraded Chip



Temperature Adjustment



Led Touch Screen



Three Operation Modes



Photoelectric Sensing Tape



Customizable Sensor Light Color



Integrated Heating Device



2.5L Large Capacity Water Tank

# Let'S Make Our Planet More Green

Generate Water And Carbon Dioxide To Merge With The Environment



Degradable material



Non-degradable material



# Safely Transport Your Cartons

Promote Strong Bonds And Foolproof Bonding Results



30% Overall Improvement In  
Safe Delivery Rate



(3 Times Value Utilization)